



IFW

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Juha OLLILA

Group Art Unit: 2131

Application No.: 10/615,461

Examiner: Unassigned

Filed: July 9, 2003

Attorney Dkt. No.: 60282.00084

For: INTEGRITY CHECK VALUE FOR WLAN PSEUDONYM

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

June 24, 2004

Sir:

The benefit of the filing dates of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:

European Patent Application No. 03007256.5 filed on 31 March 2003 in Europe

In support of this claim, a certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.



THIS PAGE BLANK (USPTO)

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,

A handwritten signature in black ink, appearing to read "Kevin F. Turner", written over a horizontal line.

Kevin F. Turner
Registration No. 43,437

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

KFT:lls

Enclosure: Priority Document (1)

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03007256.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 03007256.5
Demande no:

Anmeldetag:
Date of filing: 31.03.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Nokia Corporation
Keilalahdentie 4
02150 Espoo
FINLANDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Integrity check value for WLAN pseudonym

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L9/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

THIS PAGE BLANK (USPTO)

TBK

TIEDTKE - BÜHLING - KINNE & PARTNER (GbR)



TBK-Patent POB 20 19 18 80019 München

EPO - Munich
75

31. März 2003

Patentanwälte

Dipl.-Ing. Reinhard Kinne
Dipl.-Ing. Hans-Bernd Pellmann
Dipl.-Ing. Klaus Grams
Dipl.-Ing. Aurel Vollnhals
Dipl.-Ing. Thomas J.A. Leson
Dipl.-Ing. Dr. Georgi Chivarov
Dipl.-Ing. Matthias Grill
Dipl.-Ing. Alexander Kühn
Dipl.-Ing. Rainer Böckelen
Dipl.-Ing. Stefan Klingele
Dipl.-Chem. Stefan Bühling
Dipl.-Ing. Ronald Roth
Dipl.-Ing. Jürgen Faller
Dipl.-Ing. Hans Ludwig Trösch

Rechtsanwälte

Michael Zöblisch

March 31, 2003

US 37494

NOKIA CORPORATION

Espoo, Finland

INTEGRITY CHECK VALUE FOR WLAN PSEUDONYM

Dresdner Bank München Kto. 3939 844 BLZ 700 800 00
Deutsche Bank München Kto. 286 1060 BLZ 700 700 10
Postbank München Kto. 67043 804 BLZ 700 100 80
Mizuho Corp. Bank Düsseldorf Kto. 8104233007 BLZ 300 207 00
UFJ Bank Limited Düsseldorf Kto. 500 047 BLZ 301 307 00
//SM311

Telefon: +49 89 544690
Telefax (G3): +49 89 532611
Telefax (G3+G4): +49 89 5329095
E-Mail: postoffice@tbk-patent.de
Internet: <http://www.tbk-patent.de>
Bavariaring 4-6, 80336 München

31. März 2003

Integrity Check Value for WLAN PseudonymBACKGROUND OF THE INVENTION

5 1. Field of the invention

The invention relates to a method and a system for generating a subscriber identifier, and in particular for generating a temporal identifier such as a pseudonym.

10

2. Background of the invention

As described above, the invention relates to generating a subscriber identifier and in particular to generating a temporary identifier such as a pseudonym, in a network. Pseudonyms are used to provide a user with privacy. That is, when accessing a network service, the user might not always wish to expose his true identity. Pseudonyms offer this possibility. However, in case an arbitrary pseudonym is used, it is impossible to judge whether a user using a pseudonym is entitled to use, for example, a particular service or not. For this reason, a pseudonym is generated by an authentication server, which performs an authentication and, therefore, can validate a used pseudonym.

25

As an access method, WLAN (Wireless Local Area Network) can be used as an alternative access method to 3GPP networks. WLAN access shall provide as good network access security as GSM or UMTS access methods. 3GPP network access provides the following security services:

30

- User identity confidentiality (including user location confidentiality and user untraceability). This is achieved using a temporary identity, as described

35

above. To avoid traceability, temporary identities are not used for long periods.

- User authentication
- Network authentication
- 5 - Confidentiality of data
- Integrity of data

WLAN network access security is based on the Extensible Authentication Protocol (EAP), EAP-SIM (EAP-Subscriber Identity Module) and EAP-AKA (EAP-Authentication and Key Agreement) as specified in RFC 2284: "PPP Extensible Authentication Protocol (EAP)" by L. Blunk and J. Vollbrecht, March 1998
(<http://www.ietf.org/rfc/rfc2284.txt>), "EAP SIM Authentication" by H. Haverinen and J. Salowey, January 2003 (draft-haverinen-pppext-eapsim, <http://www.ietf.org/internet-drafts/draft-haverinen-pppext-eap-sim-09.txt>), and "EAP AKA Authentication" by J. Arkko and H. Haverinen, January 2003 (draft-arkko-pppext-eapaka, <http://www.ietf.org/internet-drafts/draft-arkko-pppext-eap-aka-08.txt>).

Both EAP-SIM and EAP-AKA authentication methods provide the confidentiality of user identity based on the use of pseudonyms.

In particular, during an authentication procedure, an authenticating node (Authenticator node) which may be an AAA (Authentication, Authorization and Accounting) server optionally provides a temporary identity, i.e., a pseudonym to the WLAN client (e.g., the subscriber). The WLAN client can present it as a user identity for subsequent authentication attempts. The EAP-SIM/AKA specifications do not define a method for the generation of pseudonyms, and leave that issue as an implementation

decision. Nevertheless, in order to make it possible in 3GPP networks that pseudonyms provided by one AAA server can be recognized by another AAA server (potentially from another vendor), some standardization is necessary.

5

According to an approach described in "WLAN - Pseudonym Generation for EAP-SIM/AKA"

(ftp://ftp.3gpp.org/tsg_sa/WG3_Security/TSGS3_26_Oxford/Docs/PDF/S3-020654.pdf), presented on the 3GPP TSG SA WG3

10 Security meeting, November 19-22, 2002, Oxford, UK, the following format for a pseudonym is proposed:

Pseudonym = Base64 (TAG||Key indicator||
AES(padding||BCD(IMSI)||random number))

15 Where:

Base64() = base 64 conversion,

|| = concatenation,

TAG is used to indicate that WLAN identity is pseudonym,

20 Key indicator indicates used keys,

AES = AES encryption algorithm in ECB mode,

Padding = the most significant bits will be padded by setting all the bits to 1, so that length of (padding||BCD(IMSI)) is 64 bits,

25 BCD() = binary coded decimal conversion, and

Random number = 64-bit (8 octets) random number.

As a basis for generating the pseudonym, an encrypted IMSI (International Mobile Subscriber Identity) is used.

30 In this way, it is assured that there is a connection between the subscriber and the pseudonym, but by using the encryption, the true identity cannot easily be discovered by unauthorized other subscribers or the like.

The IMSI is not longer than 15 digits and consists of three parts: MCC (Mobile Country Code) for identifying the country of the subscriber, usually 3 digits, MNC (Mobile Network Code) for identifying the particular home network, usually 2 to 3 digits, and MSIN (Mobile Subscriber Identifying Number), which should be no more than 10 digits. MCC and MNC uniquely identify the operator.

10 For the encryption, first a BCD (Binary Coded Decimal) conversion is carried out on the IMSI. In this way, a compressed IMSI is generated by using 4 bits to represent each digit of the IMSI. That is, the compressed IMSI is:

15 Compressed IMSI = BCD(IMSI)

The length of the IMSI is not more than 15 digits (numerical characters, 0 to 9). The length of the compressed IMSI should be 64 bits (8 octets). Since the length of the IMSI is maximum 15×4 bits = 60 bits, the most significant bits (here, the 4 leading bits) will be padded by setting all the bits to 1. It is noted that by the BCD conversion, none of the converted digits of the IMSI can be 1 since each digit is represented by 4 bits. Therefore, the padding (setting the most significant bits to 1) can be easily detected and removed, such that the compressed IMSI can be determined.

Then, a padded IMSI is created by concatenating an 8-octet random number to the compressed IMSI. This random number ensures a predetermined length, i.e., block size, and in addition it contributes to the requirement that the IMSI should not be easily decrypted. Thus, the padded IMSI is:

Padded IMSI = padding||BCD(IMSI)||random number

The thus generated padded IMSI is encrypted by the IMSI
with Advanced Encryption Standard (AES) in Electronic
5 Codebook (ECB) mode of operation by using a ciphering
key, for example a 128-bit secret key. The encrypted IMSI
has the following format:

Encrypted IMSI = AES(padding||BCD(IMSI)||random number)

10

After generating the encrypted IMSI, some more fields are
provided. A key indicator is used in order that the AAA
server that receives the pseudonym can locate the
appropriate key to decrypt the encrypted IMSI. Moreover,
15 a pseudonym tag is used to mark the identity as a
pseudonym.

All these fields are concatenated to each other, in the
form

20

Tag||Key Indicator||Encrypted IMSI.

This concatenation is converted to a printable string by
using a BASE64 method.

25

Validity of a pseudonym is verified by decrypting the
result of the AES function (i.e., decrypting the
encrypted IMSI) and checking that padding, MCC and MCN
are correct.

30

In this way, some reliability on the security is
achieved.

However, as described above, the validation of a
35 pseudonym requires a full decryption of the pseudonym.

This involves large processing, and this can be exploited by so-called DoS (Denial of Service) attacks, for example.

5 When performing DoS attacks, an attacker tries to generate an overload of a particular server such that this server can not longer provide a sufficient function. When doing so, the attacker can send multiple EAP-Response/Identity message with bogus pseudonyms. The AAA
10 server decrypts every pseudonym using the AES algorithm, checks padding and part of the IMSI (MCC and MCN) and rejects bogus pseudonyms.

Thus, the processing required for each bogus pseudonym is
15 considerable such that an overload is generated.

Moreover, an attacker can generate bogus pseudonyms randomly in order to access a service or the like. There is a certain probability that the attacker might succeed.
20 Therefore, it is desirable to further improve the security, i.e., to reduce the probability that an attacker is able to find the correct pseudonym, i.e., to forge a pseudonym.

25

SUMMARY OF THE INVENTION

Thus, it is an object underlying the invention to provide a further enhanced security and privacy for a user of a
30 pseudonym.

This object is solved by a method for generating a subscriber identifier, comprising the steps of
generating an identifier base string based on
35 encrypting a subscriber identifying value,

generating an integrity check value based on the identifier base string, and

generating a subscriber identifier based on a concatenation of the identifier base string and the integrity check value.

Alternatively, the above object is solved by a network control node for generating a subscriber identifier, comprising

means for generating an identifier base string based on encrypting a subscriber identifying value,

means for generating an integrity check value based on the identifier base string, and

means for generating a subscriber identifier based on a concatenation of the identifier base string and the integrity check value.

Thus, according to the invention, an integrity check value is added to the subscriber identifier. In this way, the subscriber identifier (which may be a pseudonym) can be validated by only referring to the integrity check value. Namely, in case the integrity check value is not correct, i.e., in case the integrity check fails, it can be determined that the subscriber identifier is corrupted, i.e., a bogus subscriber identifier.

Hence, the processing required for validating a subscriber identifier or a pseudonym can be simplified such that a server can be more resistant against DoS attacks.

Furthermore, the additional integrity check value provides more protection against forgery.

During generating the identifier base string, the subscriber identifying value may be binary coded, a

random number may be concatenated, and an encryption algorithm may be performed on the concatenated binary coded subscriber identifying value and the random number, for generating the identifier base string.

5

During generating the subscriber identifier, a base 64 conversion may be performed on the concatenated identifier base string and the integrity check value.

10 Moreover, a key indicator for indicating a used ciphering key may be concatenated to the value obtained by the encryption of the subscriber identifying value.

Furthermore, upon an identifier type indicator for
15 indicating that the identifier is a particular identifier type may be used, wherein during generating the identifier base string, the identity type indicator may be concatenated to the value obtained by the encryption of the subscriber identifying value.

20

During performing the encryption algorithm, a defined length may be provided for the concatenated binary coded subscriber identifying value and the random number, wherein the most significant bits not used for the binary
25 coded subscriber identifying value may be set to 1, respectively.

During generating the integrity check value, a pseudo random function may be performed on the identifier base
30 string using an integrity key.

Moreover, a key indicator for indicating a used ciphering key and the integrity key used for generating the integrity check value may be used, wherein during
35 generating the identifier base string the key indicator

may be concatenated to the value obtained by the encryption of the subscriber identifying value.

The pseudo random function may be a keyed hash function.

5

The calculated result of the pseudo random function performing step may be truncated to a predetermined amount of bits.

10 The subscriber identifying value may be an International Mobile Subscriber Identity.

In addition, the invention also proposes a method for validating a subscriber identifier, wherein the
15 subscriber identifier comprises a format including at least an integrity check value, the method comprising the steps of

detecting an integrity check value of a received subscriber identifier,
20 performing an integrity check based on the integrity check value and the subscriber identifier, and
rejecting the subscriber identifier in case the integrity check reveals that the subscriber identifier is not valid.

25

Alternatively, the invention proposes a network control node for validating a subscriber identifier, wherein the subscriber identifier comprises a format including at least an integrity check value, the network control node
30 comprising

means for detecting an integrity check value of a received subscriber identifier,

means for performing an integrity check based on the integrity check value and the subscriber identifier, and

means for rejecting the subscriber identifier in case the integrity check reveals that the subscriber identifier is not valid.

5 Thus, a invalid subscriber identity may be rejected only passed on the integrity check. Hence, a subscriber identity protected with an integrity check value can easily be validated without performing complicated decryption operations.

10

Moreover, in case the integrity check is successful, the subscriber identifier may be decrypted in order to perform a further detailed validation of the subscriber identity.

15

The network control node may be an AAA (Authentication, Authorization, and Accounting) server.

20

Moreover, the invention proposes a computer program product, comprising software code portions for performing the steps of the above method when the product is run on a computer.

25

The computer program product may comprise a computer-readable medium on which said software code portions are stored.

30

The computer program product may be directly loadable into the internal memory of the computer.

SHORT DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a flowchart illustrating a process of generating a pseudonym according to an embodiment of the present invention,

5 Fig. 2 shows a flowchart illustrating a process of validating a pseudonym according to the embodiment of the present invention, and

10 Fig. 3 shows a flowchart illustrating a process of verification of a pseudonym by decrypting the pseudonym.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

15

In the following, the invention is described in detail by referring to a preferred embodiment.

20 According to the invention, an integrity check value (ICV) is added to a subscriber identifier which may be, e.g., a temporary subscriber identifier or a pseudonym. In particular, this ICV is derived from the pseudonym in the form before it is subjected to the Base 64 Conversion, as described in the introductory part of the application. This form is referred to as the identifier
25 base string or pseudonym base string in the following.

The general procedure according to the embodiment is described by referring to the flowchart shown in Fig. 1.

30

In step S1, the pseudonym base string is generated based on a general subscriber identifying value, such as the IMSI. In step S2, an ICV (Integrity Check Value) of the pseudonym base string is produced. After this, in step S3
35 the pseudonym base string and the integrity check value

are concatenated. In step S4, the final pseudonym is created based on the concatenated pseudonym base string and the ICV. In the simplest way, the concatenated result of step S3 can be used as the pseudonym. Preferably,
5 however, a Base 64 conversion is performed on this result such that a printable string is obtained.

Thus, the pseudonym obtained as described above has the following format:

10

Pseudonym = Base64(Pseudonym base string||ICV)

The ICV is obtained, for example, by adopting a pseudo random function (PRF) with an integrity key on the
15 pseudonym base string:

ICV = PRF (Integrity key, Pseudonym base string)

In the following, the procedure according to the present
20 embodiment is described in more detail.

Preferably, the pseudonym according to the embodiment is in the following format:

25 Pseudonym = Base64(TAG||Key indicator||
AES(padding||BCD(IMSI)||random number) || ICV),
where:

Base64() = base 64 conversion
30 || = concatenation
TAG is used to indicate that WLAN identity is pseudonym.
Key indicator indicates used keys,
AES = AES encryption algorithm in ECB mode,

Padding = the most significant bits will be padded by setting all the bits to 1, so that length of (padding||BCD(IMSI)) is 64 bits.

BCD() = binary coded decimal conversion.

5 Random number = 64-bit (8 octets) random number.

ICV = integrity check value.

That is, the above-described pseudonym base string has the following format:

10

TAG||Key indicator||AES(padding||BCD(IMSI)||random number)

The pseudonym base string can be generated as described above, namely as described in document "WLAN - Pseudonym

15 Generation for EAP-SIM/AKA"

<ftp://ftp.3gpp.org/tsg_sa/WG3_Security/TSGS3_26_Oxford/Docs/PDF/S3-020654.pdf>.

20 In the following, the generation of the ICV for the pseudonym is described.

ICV = TRUN (PRF (integrity key, (TAG||Key indicator||
AES (padding||BCD(IMSI)||random number))), where:

25 TRUN = truncates calculated result of PRF to 96 bits.
PRF(key, data) = pseudo random function e.g. keyed hash function.

30 Truncation is used, because according to standards, the NAI (Network Address Identifier) has maximum length of 72 octets. If length of truncated ICV is 96 bits (n=96), then length of pseudonym is 39 octets after base64 encoding and realm part of NAI can be 33 octets.

35 Truncation has advantages (less information on the hash result available to an attacker) and disadvantages (less

bits to predict for the attacker). Preferably, different keys are used for the decryption and for the calculation of ICV, but the key indicator identifies both keys, such that the key indicator can be referred to as key pair indicator.

For the pseudo random function, a keyed hash function may be used, as described above. Such a keyed hash function may be SHA-1 or MD5, for example. A keyed hash function such as SHA-1 is described in FIPS Publication 180-2: "Specifications for the Secure Hash Standard", August 1, 2002, for example. Thus, the ICV is calculated using such a keyed hash function with a data integrity key.

When using SHA-1, the above calculation of the ICV is in detail as shown in the following procedure:

```
ICV = TRUNC (PRF (SHA-1 (TAG||Key indicator||
                    AES (padding||BCD(IMSI)||random number))||data
                    integrity key||padding of SHA-1)),
```

The format of the padding of SHA-1 is also specified in the above-referenced FIPS publication 180-2. The length of the data integrity key is 160 bits.

In this way, the thus determined integrity check value (ICV) is added into the pseudonym. Therefore, according to the present embodiment, validation of the pseudonym is more secure and resistance of DoS (Denial of Service) attacks is better.

The flowchart of Fig. 2 illustrates the procedure carried out when an Authenticator Node (e.g., an AAA server) validates a pseudonym received from a subscriber (e.g., WLAN client).

In step S11, the AAA server extracts the ICV from the pseudonym. This can be achieved by performing an inverted Base 64 conversion, such that the printable string (which
5 was achieved during the pseudonym generation in step S4 of Fig. 1) is converted into a series of digits again. Then, the ICV can be separated from the pseudonym base string. Thereafter, in step S12 the AAA server performs an integrity check by using the ICV on the pseudonym base
10 string. That is, the AAA server calculates an ICV and compares the result with the received ICV (i.e., the ICV attached to the received pseudonym).

If the result is positive, i.e., if the calculated ICV is
15 equal to the received ICV, (yes in step S13), the process advances to step S15. Here, further decryption can be taken by using AES and the like in order to determine the original IMSI, if necessary.

20 If, however, the result of the ICV check (step S12) is negative (i.e., the calculated ICV does not match with the received ICV), that is, if the integrity of the pseudonym cannot be verified (no in step S13), the process advances to step S14, in which the pseudonym is
25 rejected. After this, the process ends.

That is, according to the present embodiment, an ICV check may be sufficient in order to reject a bogus pseudonym. Hence, it is not necessary to carry out the
30 full decryption on every pseudonym received.

In the following, the full verification of the pseudonym, i.e. the procedure in step S15 is shortly described with reference to Fig. 3. In step S151, an AES decryption is
35 performed. Then, three further check steps are performed.

In step S152 the padding is checked, in step S153 the MCC part of IMSI is checked, and in step S154 the MCN part of IMSI padding is checked. Only when all three checks are passed, the pseudonym is accepted (step S156). If in any
5 of the steps S152 to S154 the verification fails, the pseudonym is rejected (step S155).

In the following, the key management is described in short. As mentioned above, a 128-bit encryption key (for
10 AES encryption) and a 160-bit data integrity key (for ICV calculation) is used for the generation of pseudonyms for a given period of time determined by the operator. Once that time has expired, a new key pair can be configured at all the WLAN AAA servers. The old key pairs shall not
15 be used any longer for the generation of pseudonyms, but the AAA servers must keep a number of suspended (old) key pairs for the interpretation of received pseudonyms that were generated with those old key pairs. The number of suspended key pairs kept in the AAA servers (up to 16)
20 should be set by the operator, but it must be at least one, in order to avoid that a just-generated pseudonym becomes invalid immediately due to the expiration of the key.

25 Each key pair has associated a Key Pair Indicator value. This value is included in the pseudonym, as described above, so that when a WLAN AAA receives the pseudonym, it can use the corresponding key pair for obtaining the IMSI (and thence the Username).

30

It is noted that, if a pseudonym is sent to a WLAN client but then the user does not initiate new authentication attempts for a long period of time, the key pair used for the generation of that pseudonym will eventually be
35 removed from all the WLAN AAA servers. If the user

initiates an authentication attempt after that time,
using that old pseudonym, the receiving AAA server will
not be able to recognise the pseudonym as a valid one,
and it will request the permanent user identity from the
5 WLAN client. Thence, in order to achieve that permanent
user identities are used as little as possible, it is
recommended that the key pair is not renewed very often.
The configuration of the key pairs could be done via O&M
(Operation & Management), for example. Handling of these
10 secret keys, including generation, distribution and
storage, should be done in a secure way.

As described above, when performing DoS attacks, an
attacker can send multiple EAP-Response/Identity messages
15 with bogus pseudonyms. If the procedure according to the
embodiment of the present invention is not used, the AAA
server decrypts every pseudonym using AES algorithm,
checks padding and part of IMSI (MCC and MCN) and rejects
bogus pseudonyms. When the number of the EAP-
20 Response/Identity messages is large, the operation load
on the AAA server may get very large such that the normal
function of the AAA server may be disrupted.

If, however, the present embodiment of the invention is
25 used, the AAA server calculates only the ICV using a
keyed hash algorithm for every pseudonym. Thus, it can
reject bogus pseudonyms before decryption (step S14 in
Fig. 2). Keyed hash algorithms are faster than AES
algorithm, so the AAA server can resist heavier DoS
30 attacks. E.g. SHA-1 is 50% faster than AES (Rijndael) and
MD5 is over 3 times faster than AES, see
<<http://www.eskimo.com/~weidai/benchmarks.html>>.

Moreover, also the detection of forgery is improved. In the following calculations, it is assumed that an attacker generates bogus pseudonyms randomly.

5 If the pseudonym according to the present embodiment of
the invention is not used, AAA checks padding, MCC and
MCN to detect forgery. In worst case, the probability
that an attacker can forge a random pseudonym is $1/2^{24}$,
because there are only 3 octets (24 bits, namely 3×4 bits
10 for MCN, 2×4 bits for MCC and 1×4 bits padding) to ensure
the validity of pseudonym. Namely, as described above,
for a valid pseudonym, only MCN, MCC and padding is
checked. It is noted that here "the worst case" means
that IMSI cannot be longer than 15 digits. If IMSI is
15 shorter, then there are more bits to ensure the validity
of pseudonym (padding is longer).

The probability that an attacker can forge a pseudonym
corresponding to a certain IMSI is $1/2^{64}$, because there
20 are 8 octets (64 bits, length of the compressed IMSI
having 60 bits and 4 bits padding) to ensure validity of
pseudonym.

If, however, the pseudonym according to the present
25 embodiment of the invention is used, AAA server checks
ICV, padding, MCC and MCN to detect forgery. In worst
case, the probability that an attacker can forge a random
pseudonym is $1/2^{96} \times 1/2^{24} = 1/2^{120}$, when ICV is
truncated into 96 bits. The probability that an attacker
30 can forge a pseudonym corresponding certain IMSI is
 $1/2^{96} \times 1/2^{64} = 1/2^{160}$.

Thus, according to the invention, a more reliable
detection of bogus/forged pseudonyms is achieved, and a
35 higher resistance against DoS attacks can be obtained.

It should be understood that the above description and accompanying figures are merely intended to illustrate the present invention by way of example only. The
5 described embodiment of the present invention may thus vary within the scope of the attached claims.

For example, according to the embodiment described above, the pseudonym base string (identifier base string) is
10 generated such that it has the following format:

TAG||Key indicator||AES(padding||BCD(IMSI)||random number)

The invention is not limited onto this particular format.
15 Namely, the order of the different fields can be changed arbitrarily. Moreover, some of the fields can be omitted. For example, if the used ciphering key is negotiated in another way (for example, if it is determined beforehand that a particular AAA server only use one particular
20 key), the Key Indicator field may be omitted. Furthermore, if it is not considered necessary to indicate that this particular subscriber identifier is a pseudonym, also the TAG field may be omitted. In the same way, also the padding or the random number may be
25 omitted, in order to simplify the processing in the AAA server. In addition, alternative coding procedures (instead of BCD) and encryption algorithms (instead of AES) may be adopted.

30 Furthermore, the procedure according to the embodiment described above is situated in a WLAN environment. However, also other suitable networks may be employed, as long as they permit the use of temporary identifiers or pseudonyms.

Moreover, the above embodiment is directed to the establishment of a pseudonym. However, the invention is not limited thereon. For example, also temporary or permanent subscriber identifiers may be generated using the procedure according to the present invention. Namely, for example, DoS attacks can also be performed by using bogus subscriber identifiers (which may be known) instead of pseudonyms. When adopting the procedure according to the invention, it is also sufficient to calculate the ICV only, without the necessity to perform a full decryption.

Moreover, according to the embodiment two different keys are using for encrypting the pseudonym base string on the one hand and for the ICV on the other hand. However, it is also possible to use identical keys in order to simplify the procedure, also preferably two different keys should be used in order to enhance security.

In addition, according to the above embodiment, the ICV is truncated to 96 bits. This, however, is only an example and the ICV may be truncated to any other number of bits, for example depending on the number of bits available in the subscriber identifier. If possible, also no truncation at all may be performed.

The invention proposes a method for generating a subscriber identifier, comprising the steps of generating an identifier base string based on encrypting a subscriber identifying value (S1), generating an integrity check value based on the identifier base string (S2), and generating a subscriber identifier based on a concatenation of the identifier base string and the integrity check value (S3, S4). The invention also proposes a corresponding network control node.

BEST AVAILABLE COPY

CLAIMS

1. A method for generating a subscriber identifier,
5 comprising the steps of
generating an identifier base string based on
encrypting a subscriber identifying value (S1),
generating an integrity check value based on the
identifier base string (S2), and
10 generating a subscriber identifier based on a
concatenation of the identifier base string and the
integrity check value (S3, S4).
2. The method according to claim 1, wherein the
15 identifier base string generating step comprises the
steps of
binary coding of the subscriber identifying value,
concatenating a random number, and
performing an encryption algorithm on the
20 concatenated binary coded subscriber identifying value
and the random number, for generating the identifier base
string.
3. The method according to claim 1, wherein in the
25 subscriber identifier generating step, a base 64
conversion is performed on the concatenated identifier
base string and the integrity check value.
4. The method according to claim 1, further comprising
30 the step of using a key indicator for indicating a used
ciphering key,
wherein in the identifier base string generating
step, the key indicator is concatenated to the value
obtained by the encryption of the subscriber identifying
35 value.

5. The method according to claim 1, further comprising the step of using a identifier type indicator for indicating that the identifier is a particular identifier type, wherein in the identifier base string generating step, the identity type indicator is concatenated to the value obtained by the encryption of the subscriber identifying value.

10 6. The method according to claim 2, wherein in the encryption algorithm performing step, a defined length is provided for the concatenated binary coded subscriber identifying value and the random number, wherein the most significant bits not used for the binary coded subscriber identifying value are set to 1, respectively.

7. The method according to claim 1, wherein the integrity check value generating step comprises the step of
20 performing a pseudo random function on the identifier base string using an integrity key.

8. The method according to claim 7, further comprising the step of using a key indicator for indicating a used
25 ciphering key and the integrity key used for generating the integrity check value,
wherein in the identifier base string generating step, the key indicator is concatenated to the value obtained by the encryption of the subscriber identifying
30 value.

9. The method according to claim 7, wherein the pseudo random function is a keyed hash function.

10. The method according to claim 7, wherein the calculated result of the pseudo random function performing step is truncated to a predetermined amount of bits.
- 5
11. The method according to one of the claims 1 to 10, wherein the subscriber identifying value is an International Mobile Subscriber Identity.
- 10
12. A method for validating a subscriber identifier, wherein the subscriber identifier comprises a format including at least an integrity check value, the method comprising the steps of
- 15
- detecting an integrity check value of a received subscriber identifier (S11),
- performing an integrity check based on the integrity check value and the subscriber identifier (S12), and
- rejecting the subscriber identifier (S14) in case the integrity check reveals that the subscriber
- 20
- identifier is not valid.
13. The method according to claim 12, further comprising the step of
- decrypting the subscriber identifier (S15; S151-S156) in case the integrity check is successful.
- 25
14. A network control node for generating a subscriber identifier, comprising
- means for generating an identifier base string based
- 30
- on encrypting a subscriber identifying value,
- means for generating an integrity check value based on the identifier base string, and
- means for generating a subscriber identifier based on a concatenation of the identifier base string and the
- 35
- integrity check value.

15. The network control node according to claim 14,
wherein the identifier base string generating means
comprises

5 means for binary coding of the subscriber
identifying value,

means for concatenating a random number to the
binary coded subscriber identifying value, and

10 means for performing an encryption algorithm on the
concatenated binary coded subscriber identifying value
and random number, for generating the identifier base
string.

16. The network control node according to claim 14,
15 wherein the subscriber identifier generating means is
adapted to perform a base 64 conversion on the
concatenated identifier base string and the integrity
check value.

20 17. The network control node according to claim 14,
wherein the subscriber identifier generating means is
adapted to concatenate a key indicator for indicating a
used ciphering key to the value obtained by the
encryption of the subscriber identifying value.

25

18. The network control node according to claim 14,
wherein the subscriber identifier generating means is
adapted to concatenate a identifier type indicator, for
indicating that the identifier is a particular identifier
30 type, to the value obtained by the encryption of the
subscriber identifying value.

19. The network control node according to claim 15,
wherein a defined length is provided for the concatenated
35 binary coded subscriber identifying value and the random

number and the encryption algorithm performing means is adapted to set 1 for the most significant bits not used for the binary coded subscriber identifying value.

- 5 20. The network control node according to claim 14, wherein the integrity check value generating means is adapted to perform a pseudo random function on the identifier base string using an integrity key.
- 10 21. The network control node according to claim 14, wherein the subscriber identifier generating means is adapted to concatenate a key indicator for indicating a used ciphering key and the integrity key used for generating the integrity check value to the value
15 obtained by the encryption of the subscriber identifying value.
- 20 22. The network control node according to claim 20, wherein the pseudo random function is a keyed hash function.
- 25 23. The network control node according to claim 20, wherein the integrity check value generating means is adapted to truncate the calculated result of the pseudo random function performing step to a predetermined amount of bits.
- 30 24. The network control node according to one of the claims 14 to 23, wherein the subscriber identifying value is an International Mobile Subscriber Identity.
- 35 25. A network control node for validating a subscriber identifier, wherein the subscriber identifier comprises a format including at least an integrity check value, the network control node comprising

- 26 -

means for detecting an integrity check value of a received subscriber identifier,

means for performing an integrity check based on the integrity check value and the subscriber identifier, and

5 means for rejecting the subscriber identifier in case the integrity check reveals that the subscriber identifier is not valid.

26. The network control node according to claim 25,
10 further comprising means for decrypting the subscriber identifier in case the integrity check is successful..

27. The network control node according to one of the claims 14 to 26, wherein the network control node is an
15 AAA (Authentication, Authorization, and Accounting) server.

28. A computer program product, comprising software code
portions for performing the steps of any one of claims 1
20 to 13 when the product is run on a computer.

29. The computer program product according to claim 28,
wherein said computer program product comprises a
computer-readable medium on which said software code
25 portions are stored.

30. The computer program product according to claim 28,
wherein said computer program product is directly
loadable into the internal memory of the computer.

30

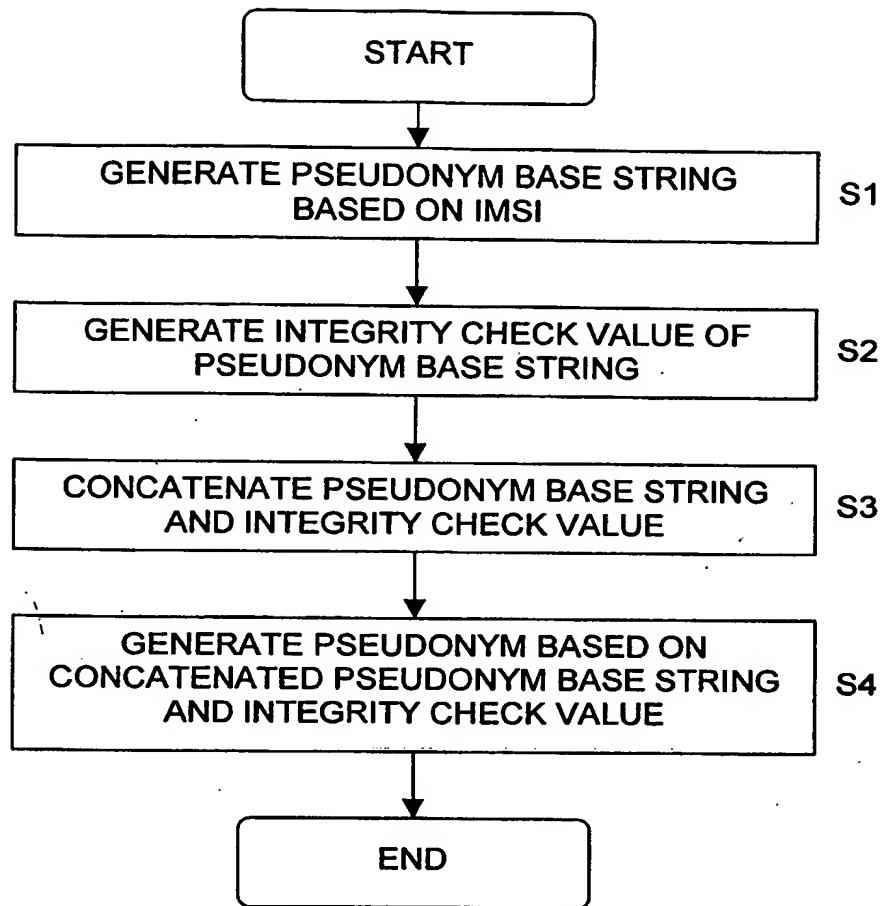


FIG. 1

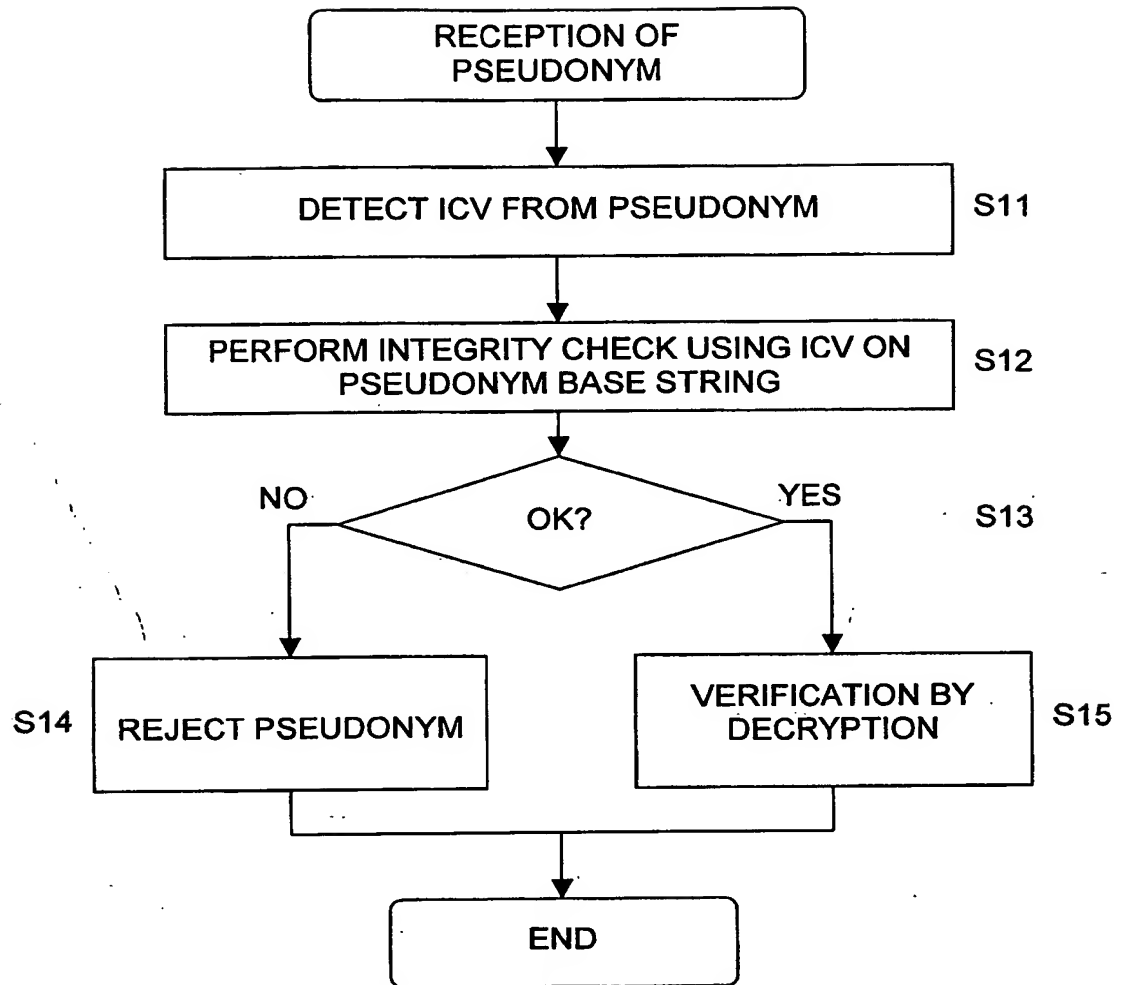


FIG. 2

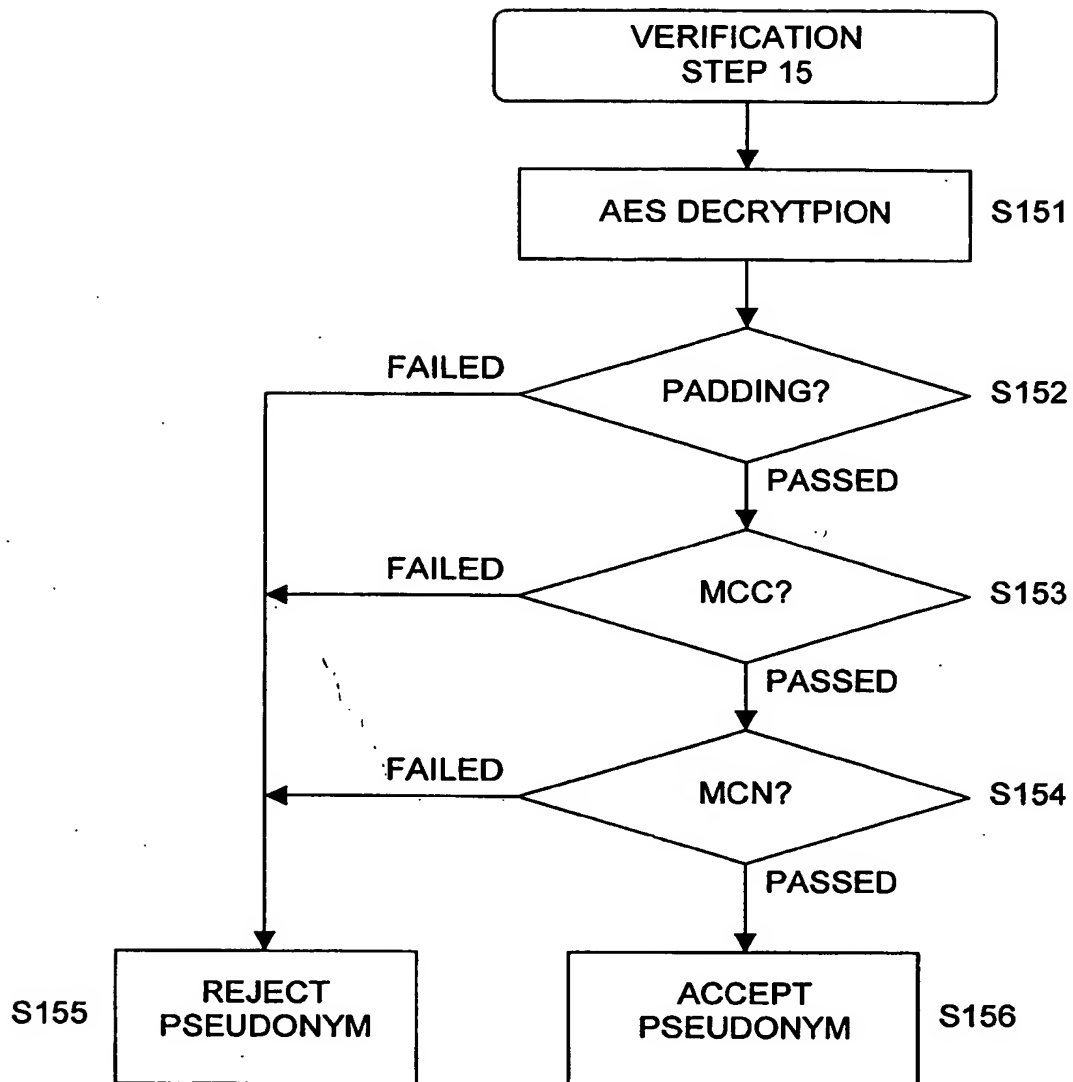


FIG. 3

THIS PAGE BLANK (USPTO)

ABSTRACT

The invention proposes a method for generating a
5 subscriber identifier, comprising the steps of generating
an identifier base string based on encrypting a
subscriber identifying value (S1), generating an
integrity check value based on the identifier base string
(S2), and generating a subscriber identifier based on a
10 concatenation of the identifier base string and the
integrity check value (S3, S4). The invention also
proposes a corresponding network control node.

(Fig. 1)

THIS PAGE BLANK (USPTO)